


## PGslide® Rohrgleitlager, allseits beweglich DN 40 – 600

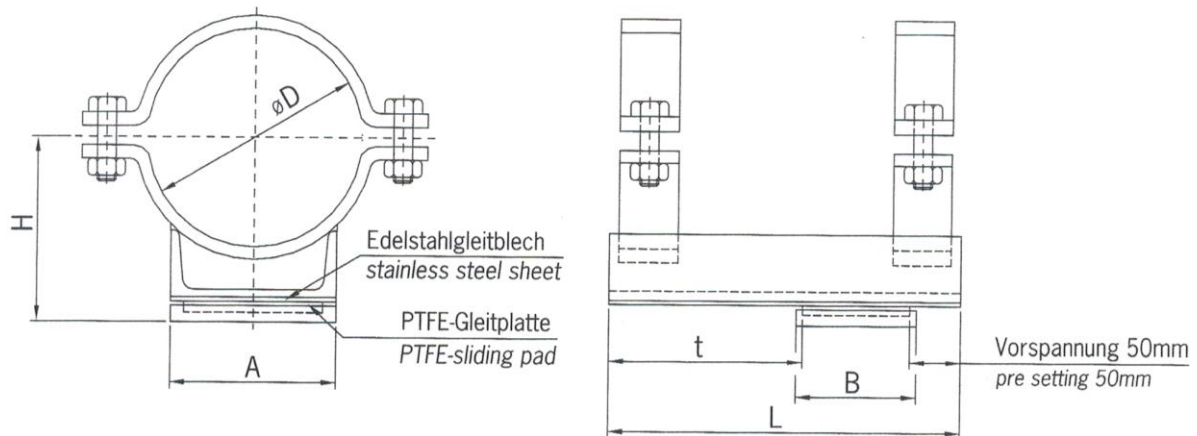

DN	$\varnothing D$	H	A	B	L*	
					t=70	t=150
40	48,3	74	50	50	150	230
50	61,0	81	50	50	150	230
65	77,0	93	50	50	150	230
80	88,9	97	50	50	150	230
100	114,3	111	80	50	150	230
125	139,7	128	100	60	160	240
150	168,3	145	100	60	160	240
200	219,1	168	120	100	200	280
250	273,0	202	120	100	200	280
300	323,9	233	160	100	200	280
350	355,6	256	160	100	200	280
400	406,4	276	200	100	200	280
500	508,0	338	240	100	200	280
600	610,0	400	240	100	200	280

\* bei Hub [mm] • at sliding path [mm]

Beachten Sie bitte die Konstruktionshinweise • Please observe the remarks concerning design.  
Sondergrößen und Bauformanpassung auf Anfrage • Special sizes and design on customer request.

Stand 09/2015

**PG Systemtechnik GmbH & Co. KG**

+ 49 2431 9745671

+ 49 2431 9745673

[info@pgtec.de](mailto:info@pgtec.de)



**PG Systemtechnik**

Gleitlagertechnik

bearing technology

[www.pgtec.de](http://www.pgtec.de)